



UltrimiS W

Ultrasonic water meter

DN15-DN50



UltrimiS W, a state-of-the-art ultrasonic water meter with the latest patented design features the W-Sonic Technology, a unique metering method. The W-Sonic Technology enables meter readings in the R800 range with the starting flow already from 0.75 l/h (at DN15).

The meter is made to the highest quality standards and all materials in contact with water are free from heavy metals (for the composite meter body). The water meter is rated at IP68 and with a high resistance to hydraulic shock and magnetic interference. The measurement chamber is designed to provide the water meter with insensitivity to hydraulic shock. The ultrasonic measurement technology of the water meter is completely impervious to interference from magnetic fields.


APPLICATION

Cold water supply systems with the maximum water temperature of 50°C, requiring reliable water consumption metering and reliable data communication methods, including remote meter reading over NFC or RF. The water meter can be installed in any orientation and does not require upstream and downstream sections of straight piping.



ULTRIMIS W

ADVANTAGES

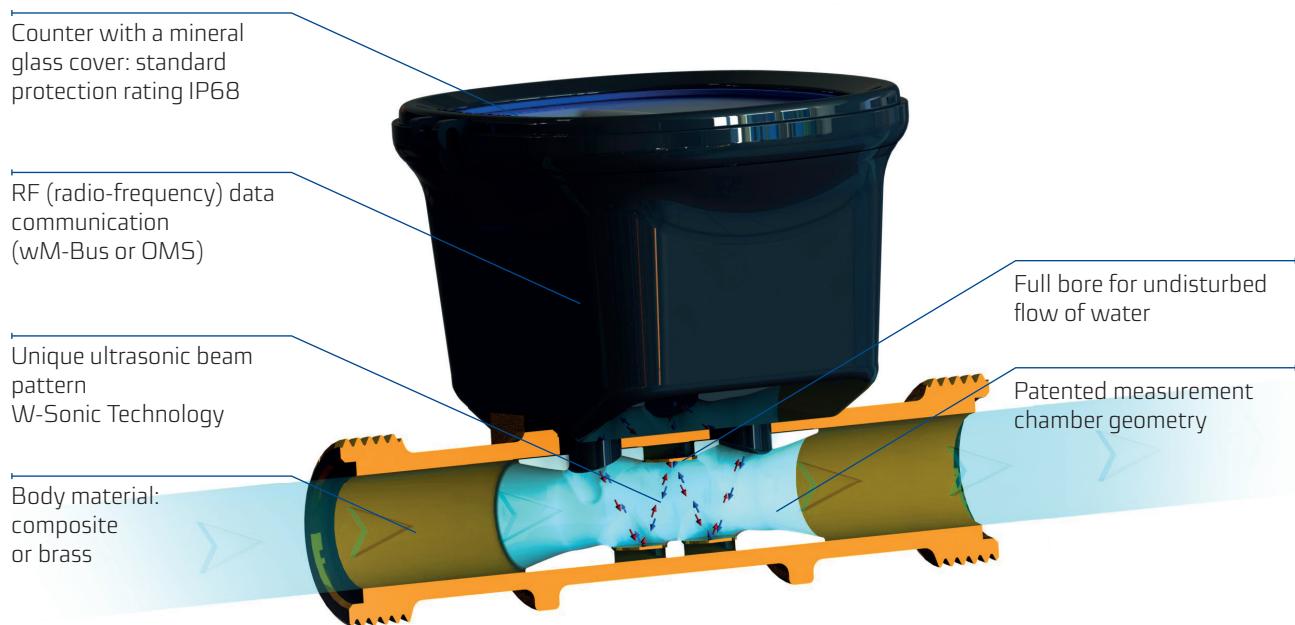

ADVANTAGES

PROVIDES SAVINGS

- High-precision measurement improve **efficiency** of water use: the water meter can detect all leaks in the supply system
- No **moving parts** for a high resistance to fouling: cost-free inspection and maintenance
- No upstream or downstream straight sections of piping required
- **Compact** size for easy installation in confined spaces
- Robust design and **minimum electrical power demand** for a stable, long-term operation
- A wide **measurement range** with immunity to electrical conductivity of metered water (as required for electromagnetic water meter systems)
- Extremely **low pressure loss** (and a low resistance to flow)



CONVENIENT IN OPERATION

- Standard **IP68**-rated hermetically sealed body
- No risk of physical wear of the measurement chamber components, even during continuous operation at high flow rates
- MAP: **16 bar**
- Body material: **brass** or **composite**
- Resistant to strong **magnetic fields**
- Resistant to **hydraulic shock**
- Highly resistant to overload flow rate, Q_4

MEASUREMENT ACCURACY

- Optimized measurement range: up to **R800** in every operating orientation (**H**, **V**, and **H/V**)
- Starting flow already from **0.75 l/h** at **DN15**
- **Stable** measurement system performance by insensitivity to fouling
- Back flow **measurement** enabled by a symmetrical structure and the applied measurement algorithms


ENVIRONMENTALLY FRIENDLY

- Extremely **low power usage** when in operation
- Very low lithium content: **Li < 1.5 g**
- Maximum design battery life of 16 years (depending on the configuration and environmental conditions)
- **No heavy metals** in the materials in contact with potable water (for the composite meter body)
- Low energy output at the water supply side (the unit pressure drop across the water meter is **0.17 bar** at DN40 for Q_3)
- A measurement range up to R800 is also available for the water meter installation length **L = 80 mm**
- **Very low weight**: low costs of transport
- Low carbon footprint



ADVANTAGES

INNOVATIVE

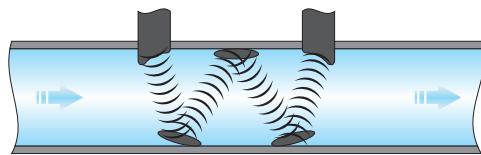

The Ultramis W water meter features a unique measurement system: it emits an ultrasonic beam across the measurement chamber, which results in steady indications and errors in the whole measurement range. This is the W-Sonic Technology which includes distinctive characteristics:

- With its unique ultrasonic beam pattern, the Ultramis W can be much more compact than other ultrasonic metering systems
- The full-bore design does not entrap any fouling or solids
- Insensitive to measurement bias from water contamination
- Sophisticated control algorithms of the ultrasonic beam system provide compensation for component ageing
- Requires no filters or check valves

REGULATORY AND STANDARD COMPLIANCE

- Directive 2014/32/EU of the European Parliament and of the Council of 26 February 2014 on the harmonisation of the laws of the Member States relating to the making available on the market of measuring instruments
- Polish Act of 13 April 2016 on conformity assessment and market control systems
- EN-ISO 4064-1 to 5:2014(E) – Water meters for cold potable water and hot water
- OIML R49:2013 – Water meters for cold potable water and hot water
- EC Type Test Certificate TCM 142/16-5405 for cold water applications
- Classification of climate and environmental requirements – Class B (EN-ISO 4064:2014)
- Classification of environmental and mechanical requirements – Class M1 (Directive 2014/32/EU of 26 February 2014)
- Classification of environmental and electromagnetic requirements – Class E1, E2 (EN-ISO 4064:2014; Directive 2014/32/EU of 26 February 2014)s
- PZH (NIH) approval (all materials of the Ultramis W ultrasonic water meter have the appropriate Hygiene Approvals for contact with potable water)
- Directive 2014/53/EU of the European Parliament and of the Council of 16 April 2014 on the harmonisation of the laws of the Member States relating to the making available on the market of radio equipment and repealing Directive 1999/5/EC
- WELMEC 7.2 edition 5
- WRAS certified
- KIWA U certified
- DVGW certified
- IP68 body proof testing



Communication

- Water meter data reading over NFC (Near Field Communication)
- RF (radio-frequency) reading of indications compatible with WMBUS OMS T1
- RF indication reading for walk-by and drive-by reading systems and stationary reading systems without any reconfiguration required
- Secondary verification at any suitable location with the Testbox module and a dedicated application

NFC CONFIGURATION

The Ultrrimis water meters feature standard NFC data communication which enables configuration of the operating mode, reading of actual parameter values of the instrument and downloading the historical indications of statuses and errors (even at a low battery voltage or meter failure).

The Ultrrimis W water meter has a dedicated data communication interface which comprises a mobile app and the Testbox module. The data communication interface enables re-verification by secondary verification operators.


RF READING

- The water meter has an integrated RF data communication module for easy and efficient remote reading.
- Device-level RF data frame encryption (OMS-compliant)
- Data transmission: previous month's consumption, current month's consumption, And actual (live) consumption data
- Alarms:
 - Back flow
 - Meter leak
 - Water main leak
 - Zero flow
 - Tampering detected
 - No water
 - Low battery





LCD DISPLAY FUNCTIONS

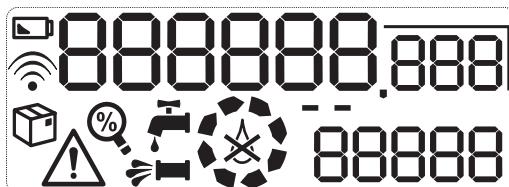

888888

Water meter indication in m³

888

Water meter indication in dm³

888888

Actual flow (water meter primed with water)
Software version number and CRC* (no water detected)



Low battery



RF transmission on



Shipping mode

Shipping mode disabled when the minimum flow rate detected is:
5L at DN15; 8L at DN20; 12.6L at DN25; 20L at DN32; 32L at DN40;
50L at DN50; or disabled on command via NFC



Tampering detected



Test mode



Back flow

Alarm triggered after > 45 s of back flow time
The flow direction indicator is animated clockwise.



Water meter leak

Alarm trigger: flow > 0.3 x Q₂ for 240 min



Water main leak (bypass flow)

Alarm trigger: flow > Q₄ for 30 s



Animated water flow direction indicator

The flow direction indicator is animated clockwise.



No water

Alarm triggered after 30 s



Metering online



Zero flow

Alarm triggered after > 8 s of zero flow
The flow direction indicator is steady.

EVENTS NOT INDICATED ON THE LCD

Overtemperature
<2°C or >50°C switchover

*1) CRC: a control checksum value which verifies if the software source code is correct.


Table 1. TECHNICAL SPECIFICATIONS

Specification			Ultrrimis W								
			UL2,5	UL2,5-01	UL4	UL4-01	UL6,3	UL10	UL16	UL25	
Nominal diameter	DN	mm	15		20		25	32	40	50	
Continuous flow rate	Q_3	m^3/h	2.5		4		6.3	10	16	25	
Overload flow rate	Q_4	m^3/h	3.125		5		7.875	12.5	20	31.25	
Instantaneous flow rate	Q_2	dm^3/h	16		25.6		40.32	64	102.4	160	
Minimum flow rate	Q_1	dm^3/h	10		16		25.2	40	64	100	
Starting flow	—	dm^3/h	0.75		1.2		1.89	3	4.8	12	
Measurement range	R	Q_3/Q_1			R250* in standard						
Range	—	Q_2/Q_1			1.6						
Temperature class (EN and OIML)	—	°C			T30, T50						
Flow disturbance immunity class (EN)	—	—			U0, D0						
Counter indication range	—	m^3			999999						
Actual scale interval	—	m^3			0.001						
Maximum permissible error in the range: $Q_2 \leq Q \leq Q_4$	ε	—			± 2 for cold water $T \leq 30^\circ\text{C}$ ± 3 for water $T > 30^\circ\text{C}$						
Maximum permissible error in the range: $Q_1 \leq Q < Q_2$	ε	—			± 5						
Battery	—	—			2x integrated 3.6 V DC lithium AA batteries						
RF	—	—			868 MHz up to 25 mW E.R.P. 434 MHz up to 10 mW E.R.P.						
Water pressure class	(EN) (OIML)	— —	bar	MAP16						0.25	
Pressure loss class at Q_3	(EN) (OIML) Mfr-specified	ΔP — —		0.3 to 16							
Installation orientation	—	—			0.4						
Back flow, manufacturer-specified	—	—			0.4						
Relative humidity	—	%			0.28						
IP rating	—	—			0.26						
Body material			brass 7/8" -> 3/4" **	composite	brass 0.3	composite 0.4			brass		
Connection end thread size	G G1	inch mm	80 115	110 165	80 110	105 115	130 190	105 130	165 260	260 300	flanged ends **** 155
Water meter length	L	mm									
Height	H H1 H2 h	mm	83; 84***	83	88.5		95	102.5	111	158	
Counter size	d D	mm	88		94		100	107	117	164	
Flange size	Dz	mm	163		169		175	182	192	240	
Weight	—	kg	14; 15***	14	17.5		21	25	30.5	72	
					87						
					94.5						
					-						
					165						
					1.68	2.15	6.29; 6.75; 6.95				


*) Also available with: R400, R800

) Thread size $7/8" \rightarrow 3/4"$ available for 115 mm long versions only.*) Applies to $7/8" \rightarrow 3/4"$ thread size

****) Also available in G2 1/2 version.

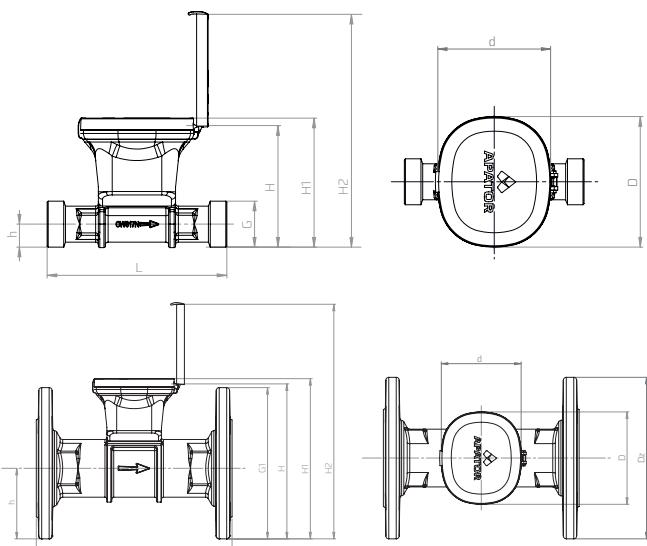

Connection fittings

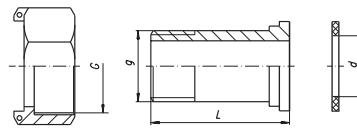


Nut, Connection end, Gasket


DN	G inch	g inch	d mm	L mm
15	3/4"	1/2"	17	37.5
20	1"	3/4"	23	45.5
25	1 1/4"	1"	29	46.5
32	1 1/2"	1 1/4"	36	56
40	2"	1 1/2"	43	70

PRESSURE LOSS CHART


Pressure loss

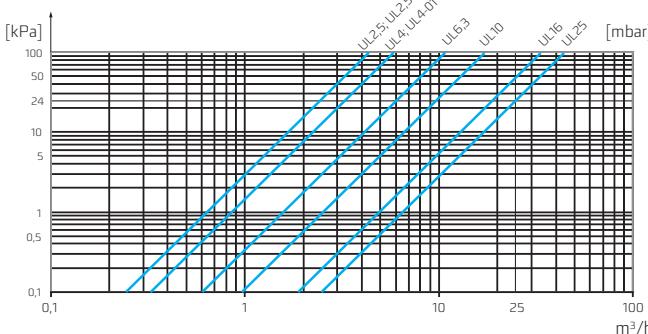

TYPICAL ERROR CHART

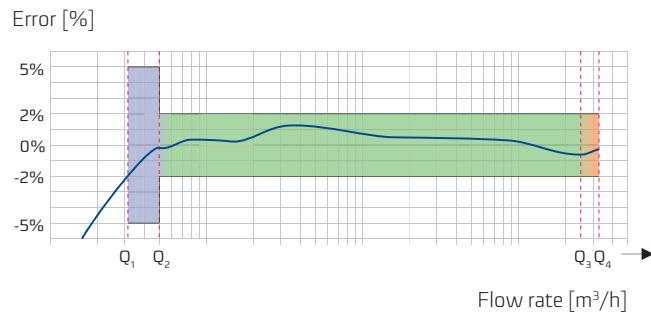

Installation, configuration and remote reading

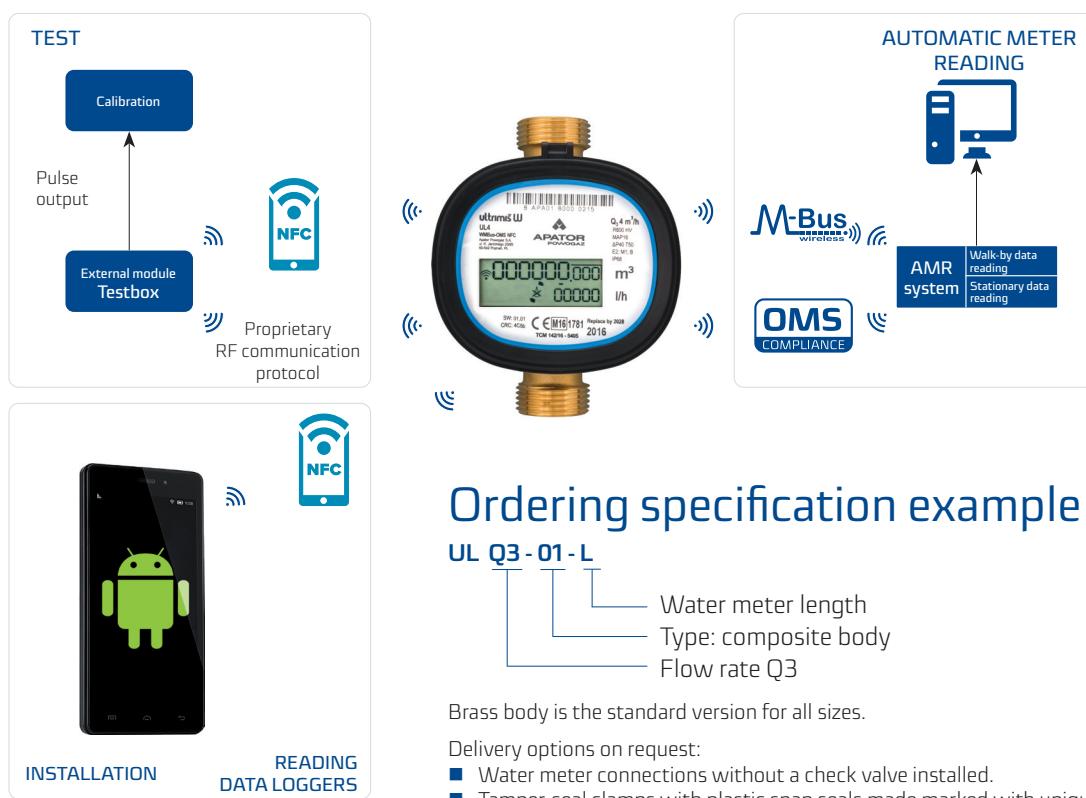

Ordering specification example

UL Q3 - 01 - L

Water meter length
Type: composite body
Flow rate Q3

Brass body is the standard version for all sizes.

Delivery options on request:

- Water meter connections without a check valve installed.
- Tamper-seal clamps with plastic snap seals made marked with unique ID numbers.

Uppgifterna gäller vid datumet för utfärdandet av detta dokument.
Tillverkaren har rätt att ändra och förbättra produkterna utan föregående meddelande.
Denna publikation är endast avsedd för informationsändamål.



KONTAKTUPPGIFTER

Postadress:
Ngenic Sverige AB
Kungsgatan 41
753 21 Uppsala

sales@ngenic.se
018 - 472 18 18
www.ngenic.se